








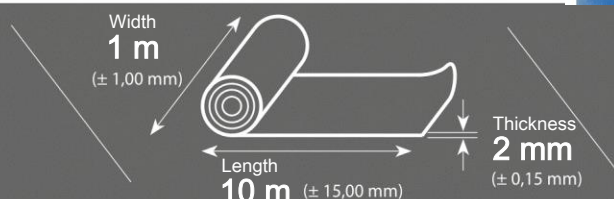


ALU FLOOR PROTECT



High density PE foam floor underlay with integrated 10mm connecting tape, aluminium tape and 60mm overlap.



Area
10 m²

	Material			High density polyethylene 100 kg/m3)	Norm
	RWS	Sound proofing	16%	EPLF WD 021029-5	
	IS	Sound dampening	20 dB	DIN EN 10140	
	R	Heat conductivity	0,04 m²K/W	EN 12664	
	SD	Moisture protection	800	DIN EN 12086	
	CS	Pressure proofing	70 kPa	DIN EN 826	
	CC	Pressure resistance	20 kPa	DIN EN 1606	
	DL	Permanent elasticity	>100000 cycles	DIN EN 13793	
	RLB	Shock resistance	1200 mm	DIN EN 13329	
	PC	Floor leveling	1,3 mm	CEN TS 16354	
	RTF	Fire resistance	F _{fl}	DIN EN13501-1	

Uses:

Underlay recommended for laminated floors and floor heating due to low heat resistance and high conductivity.

Properties:

Doesn't require vapor proof foil.

Chemical resistance:

High thermal conductivity, sound dampening, sound proofing, high weight resistance. No plasticizers, azbestos, formaldehydes, halogenes or heavy metals. Product complies with french recommendation A+ VOC. Water, most house cleaning products, salt solutions, acids, alkalites, partly resistant to organic solvents and hydrocarbons.

Storage:

Keep indoors, protect from the sun.

Installation:

Easy to cut with a razor blade. Place silver side up. Connect strips with intergrated tape.