










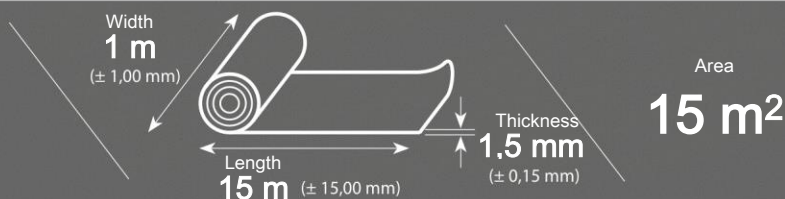

ECO THERMO



FLOOR PROTECTOR is a permanently elastic floor underlay made of low-density polyethylene foam.

Box - 20 rolls



LDPE	Material	Low density polyethylene (60kg/m3)	Norm	
	RWS	Sound proofing	2%	EPLF WD 021029-5
	IS	Sound dampening	18 dB	DIN EN 10140
	R	Heat conductivity	0,04 m ² K/W	EN 12664
	SD	Moisture protection	-	DIN EN 12086
	CS	Pressure proofing	40 kPa	DIN EN 826
	CC	Pressure resistance	-	DIN EN 1606
	DL	Permanent elasticity	>100 000 cycles	DIN EN 13793
	RLB	Shock resistance	-	DIN EN 13329
	PC	Floor leveling	1 mm	CEN TS 16354
	RTF	Fire resistance	F _{fl}	DIN EN13501-1

Uses:

Underlay recommended for panel flooring with click system and floor heating.

Good sound proofing, water resistance, anti-moisture protection. No plasticizers, asbestos, formaldehydes, halogenes or heavy metals.

Properties:

Water, most house cleaning products, salt solutions, acids, alkalites, partly resistant to organic solvents and hydrocarbons.

Chemical resistance:

Keep indoors, protect from the sun. Despite degasing during storage, the foam could still contain traces of

Storage:

izobutane, which when mixed with oxygen creates very flammable gases. Keep well ventilated, especially at ground level. Avoid electrostatics. Keep away from fire and anything that could ignite one. Smoking is prohibited.

Installation:

Easy to cut with a razor blade. Connect the underlay strips with the designated tape f.e Korner multifunctional aluminium tape.