










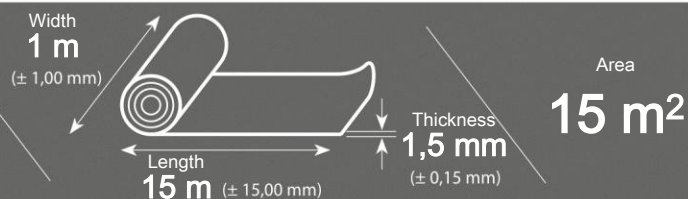

# LVT GRIP PROTECTOR

LVT GRIP PROTECTOR is permanently elastic underlay made of 93% natural raw materials and polyurethane binders. It consists of LVT grip surface, a polyurethane layer as well as poliester layer.

Palette – 60 rolls

Density – 120 kg/m<sup>3</sup>



PE	Material	Poliurethane + LVT foil (120 kg/m <sup>3</sup> + 920 kg/m <sup>3</sup> )		Norm
	RWS	Sound proofing	8%	EPLF WD 021029-5
	IS	Sound dampening	18 dB	DIN EN 10140
	R	Heat conductivity	0,038 m <sup>2</sup> K/W	EN 12664
	SD	Moisture protection	-	DIN EN 12086
	CS	Pressure proofing	60 kPa	DIN EN 826
	CC	Pressure resistance	20 kPa	DIN EN 1606
	DL	Permanent elasticity	>100 000 cycles	DIN EN 13793
	RLB	Shock resistance	700 mm	DIN EN 13329
	PC	Floor leveling	1,2 mm	CEN TS 16354
	RTF	Fire resistance	B <sub>f1</sub>	DIN EN13501-1

#### Uses:

Underlay recommended for laminated floors and floor heating due to low heat resistance and high conductivity. Great weight resistance, required for vinyl floors (LVT). Equipped with extra grip layer (GRIP) that protects panel locks from breaking.

#### Properties:

High heat conductivity, sounds proofing and dampening, high weight resistance, water resistant, anti-moisture protection. No plasticizers, azbestos, formaldehydes, halogenes or heavy metals. Product complies with french recommendation A+ VOC, Blue Angel norm and the German AgBB. Product doesn't require any additional safety measures.

#### Chemical resistance:

Water, most house cleaning products, salt solutions, acids, alkalites, partly resistant to organic solvents and hydrocarbons.

#### Storage:

Keep indoors, protect from the sun.

#### Installation:

Easy to cut with a razor blade. Place with grip layer (GRIP) facing up.