



# LVT PREMIUM



LVT PREMIUM is floor underlay made from natural materials and high density polyurethane. It also sports an anti slip layer.  
Box - 40 rolls

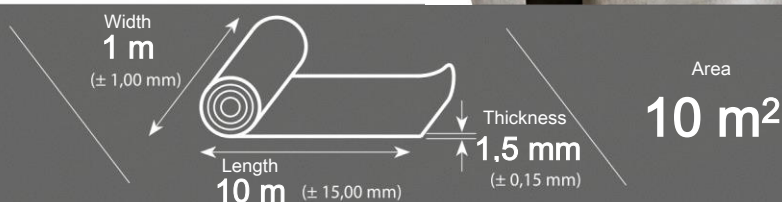

	Material	High density polyurethane(1000 kg/m3)	Norm	
	RWS	Sound proofing	8%	EPLF WD 021029-5
	IS	Sound dampening	16 dB	DIN EN 10140
	R	Heat conductivity	0,009 m²K/W	EN 12664
	SD	Moisture protection	-	DIN EN 12086
	CS	Pressure proofing	440 kPa	DIN EN 826
	CC	Pressure resistance	76 kPa	DIN EN 1606
	DL	Permanent elasticity	>150.000	DIN EN 13793
	RLB	Shock resistance	600 mm	DIN EN 13329
	PC	Floor leveling	0,7 mm	CEN TS 16354
	RTF	Fire resistance	Bfl	DIN EN13501-1

#### Uses:

Sound dampening floor underlay with high weight resistance. Dedicated to floor panels with click system. Does not require vapor proof foil.

#### Properties:

Sound dampening, water resistant, anti-moisture protection. No plasticizers, azbestos, formaldehydes, halogenes or heavy metals.

#### Chemical resistance:

Water, most house cleaning products, salt solutions, acids, alkalites, partly resistant to organic solvents and hydrocarbons.

#### Storage:

Keep indoors, protect from the sun. Despite degasing during storage, the foam could still contain traces of izobutane, which when mixed with oxygen creates very flammable gases. Keep well ventilated, especially at ground level. Avoid electrostatics. Keep away from fire and anything that could ignite one. Smoking is prohibited.

#### Installation:

Easy to cut with a razor blade. Place with anti-slip layer facing up (foil secured side up). Connect the underlay strips with the designated tape f.e Korner multifunctional aluminium tape.