










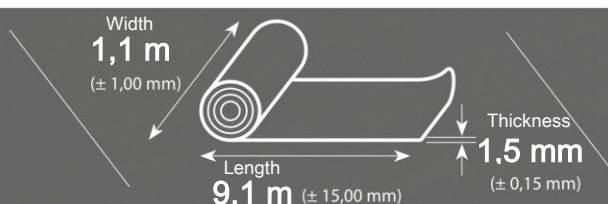

LVT PROTECTOR



LVT PROTECTOR is a high density EVA foam floor underlay.



Area
10 m²

PE	Material	High density polyethylene 180 kg/m ³	Norm
	RWS Sound proofing	-	EPLF WD 021029-5
	IS Sound dampening	20 dB	DIN EN 10140
	R Heat conductivity	0,04 m ² K/W	EN 12664
	SD Moisture protection	-	DIN EN 12086
	CS Pressure proofing	150 kPa	DIN EN 826
	CC Pressure resistance	-	DIN EN 1606
	DL Permanent elasticity	-	DIN EN 13793
	RLB Shock resistance	-	DIN EN 13329
	PC Floor leveling	1 mm	CEN TS 16354
	RTF Fire resistance	-	DIN EN13501-1

- Uses:** Sound dampening floor underlay with high weight resistance. Dedicated to floor panels with click system. Does not require vapor proof foil.
- Properties:** Sound dampening, water resistant, anti-moisture protection. No plasticizers, azbestos, formaldehydes, halogenes or heavy metals.
- Chemical resistance:** Water, most house cleaning products, salt solutions, acids, alkalites, partly resistant to organic solvents and hydrocarbons.
- Storage:** Keep indoors, protect from the sun. Despite degasing during storage, the foam could still contain traces of izobutane, which when mixed with oxygen creates very flammable gases. Keep well ventilated, especially at ground level. Avoid electrostatics. Keep away from fire and anything that could ignite one. Smoking is prohibited.
- Installation:** Easy to cut with a razor blade. Lay smooth side up. Connect the underlay strips with the designated tape f.e Korner multifunctional aluminium tape