




PERFORMA 3

A high density underlay made up of 93% natural raw materials and polyurethane binders, laminated with two water vapour control layers Box – 40 rolls

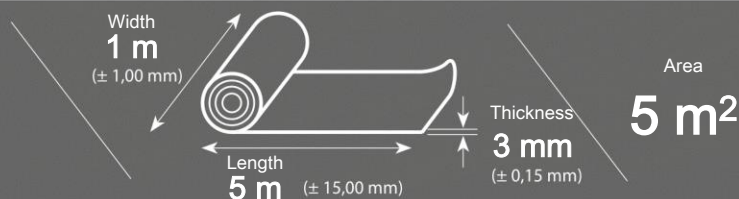

PU	Material	Poliurethane/Mineral 860 kg/m ³ +/-10%	Norm
	RWS Sound proofing	30%	EPLF WD 021029-5
	IS Sound dampening	19 dB	DIN EN 10140
	R Heat conductivity	0,010 m ² K/W	EN 12664
	SD Moisture protection	SD100	DIN EN 12086
	CS Pressure proofing	100 kPa	DIN EN 826
	CC Pressure resistance	37 kPa	DIN EN 1606
	DL Permanent elasticity	>2 500 000 cycles	DIN EN 13793
	RLB Shock resistance	950 mm	DIN EN 13329
	PC Floor leveling	1,57 mm	CEN TS 16354
	RTF Fire resistance	B _f s ₁	DIN EN13501-1

- Uses:** Underlay recommended for laminated floors and floor heating due to low heat resistance and high conductivity. It's also sports great acoustic properties and weight resistance. It's equipped with a dual moisture protection layer. High heat conductivity, sounds proofing and dampening, high weight resistance, water resistant, anti-moisture protection. No plasticizers, azbestos, formaldehydes, halogenes or heavy metals. Product complies with french recommendation A+ VOC, Blue Angel norm and the German AgBB. Product doesn't require any additional safety measures.
- Properties:** Water, most house cleaning products, salt solutions, acids, alkalites, partly resistant to organic solvents and hydrocarbons.
- Chemical resistance:** Keep indoors, protect from the sun.
- Storage:** Easy to cut with a razor blade. Place with vapor protect layer facing to the top (silver side up). Connect the underlay strips with the designated tape f.e Korner multifunctional aluminium tape
- Installation:**